

- Chrome coated or PC spot frame in white color
- 316 L Press forming chrome body
- Polycarbonate glass
- 316 L Stainless connectors
- Operates with alternate or direct current
- Underwater connector
- H07RNF rubber cable

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
AC5Y18	WW-NW-CW	12-24V DC	21	2100	1,1
AC5Y18	WW-NW-CW	12-24V DC	32	3200	1,1
AC5Y18	WW-NW-CW	12-24V DC	46	4800	1,1
AC5Y18*	RGB	24V DC	26	-	1,1
AC5Y18*	RGB	24V DC	36	-	1,1

Power and Lumen values provided are based off of a lensless product with cold white (CW) LED. It may vary according to the desired color.
* RGB products can be produced in 12-24 V DC and product values may vary.

C Light Color Options

WW: Warm White	3000K	R: Red	625nm
NW: Natural White	4000K	G: Green	525nm
CW: Cold White	6500K	B: Blue	465nm
RGB		A: Amber	590nm

S System Options

- 01 Standart (ON/OFF)
- 02 PWM-DIM
- 03 Invert PWM-DIM

O Lens Options



XN: Extra Narrow Angle N: Narrow Angle M: Medium Angle XW: Without lens

B Body Options



15: Chrome coated

16: White




Order Code

P . W . C . S . O . B




Product Diagrams

Polar Diagram

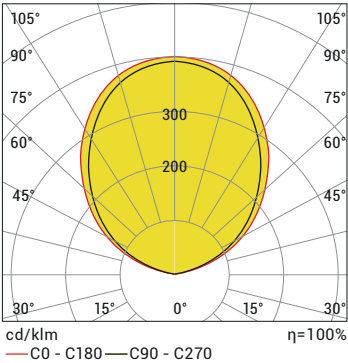

Conical Diagram

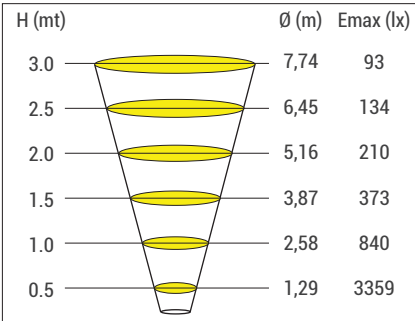

AC5Y 18LED CW 120D 20W 12-24V DC IP68

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW	•	•		•	•	
R,G,B,A	•	•		•	•	
RGB	•	•				
RGBA/W	•	•				
RGB DMX			•			
WHITE DMX			•			

Product Code	Voltage (V DC)	Control Systems	Cable Core Quantity		
			Mono	RGB	RGB W/A
AC5Y09	24	PWM	2x	4x	-
	12-24	ON/OFF	2x	-	-
	12-24	IN-PWM	2x	5x	-

