




High Bay LED Luminaire

BERT



IK 08

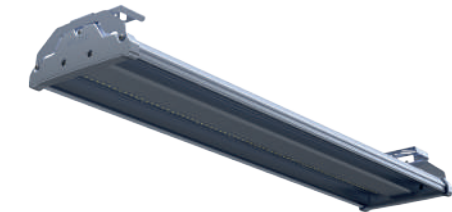

- Anodized aluminum extrusion profile body
- Suitable for hygienic environments, dust-free body design
- UV protective PVC side cover
- Tempered glass with optional safety film
- High efficiency optical lens
- Optional stainless steel mounting clip

PW

Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Dimensions (L) (mm)	Weight (kg)
BERT40	WW-NW-CW	220-240V AC	45	5.580	415	2,9
BERT40	WW-NW-CW	220-240V AC	64	7.703	415	2,9
BERT80	WW-NW-CW	220-240V AC	110	12.980	815	4,8
BERT80	WW-NW-CW	220-240V AC	134	15.424	815	4,8
BERT120	WW-NW-CW	220-240V AC	166	21.365	1215	8,8
BERT120	WW-NW-CW	220-240V AC	200	25.200	1215	8,8
BERT160	WW-NW-CW	220-240V AC	248	31.250	1615	10,4

**Power and Lumen values provided are based off of a "cold white (CW) LED".*

C

Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

**Different colors are optional*


S

Driver Options

- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit
- 16 Radar Sensor

O

Lens Options



J

Junction Options



01: Cable

02: IP Socket

U


Upper Part Options

- T: Tempered Glass
- T+F Tempered Glass with Safety Film



Order Code


P.W.C.S.O.J.U.M




Please contact our sales representatives for special application requests other than the standard product.

Product Diagrams

Polar Diagram

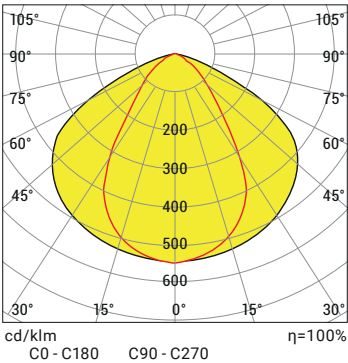


Conical Diagram

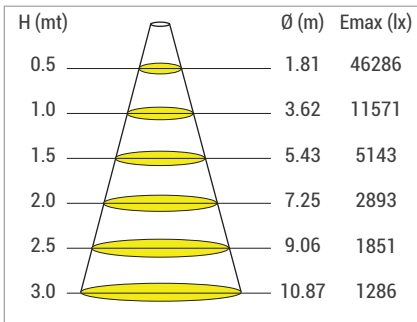

BERT120 NW40 60D 166W 220VAC IP66

M Mounting Options

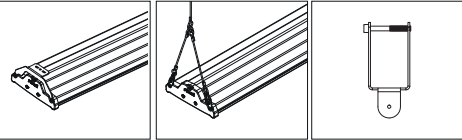

M01: Surface Cable Tray Mounting **M02:** Pendant Mounting **M03:** Busbar Hanger

**For M02 option rope not included*

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW ● ● ●				●	●	



Industrial Lighting