


Road Lighting Luminaire

SWH16



- Electrostatic powder coated aluminum injection body and spigot
- 4mm tempered glass
- Aluminum injection side covers
- Stainless connectors
- Electrostatic powder coated connection pipe
- 6kV/10kV lighting protective circuit

PW

Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
SWH16	WW-NW-CW	220-240V AC	100	14.300	7,6
SWH16	WW-NW-CW	220-240V AC	120	17.000	7,6
SWH16	WW-NW-CW	220-240V AC	150	20.500	7,6
SWH16	WW-NW-CW	220-240V AC	200	25.000	7,6

**Power and Lumen values provided are based off of a "cold white (CW) LED".*

C

Light Color Options

WW: Warm White	3000K
NW: Natural White	4000K
CW: Cold White	6500K

**Different colors are optional*


S

Driver Options

- 01Standard Driver
- 06DALI Driver


O

Lens Options



G

Housing Color Options



Order Code

P

W

C

S


O

G



Please contact our sales representatives for special application requests other than the standard product.

Product Diagrams

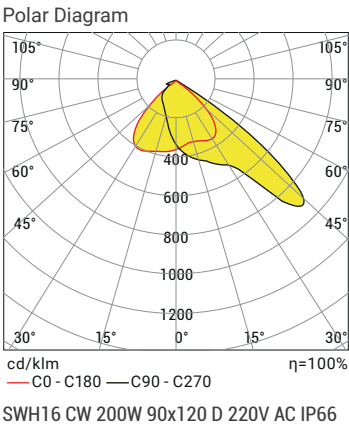

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						



Pendik Sport Complex, İstanbul