

- Electrostatic powder coated aluminum injection housing
- High cooling capacity body design
- 4mm, tempered luminaire glass
- Stainless fittings and clips
- Electrostatic painted DKP / Galvanized mounting feet

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
WH9	WW-NW-CW	220-240V AC	95	13.100	5,2
WH9	WW-NW-CW	220-240V AC	110	14.600	5,2
WH9	WW-NW-CW	220-240V AC	120	16.210	5,2

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver

O Lens Options



N: Narrow Angle

M: Medium Angle

W: Wide Angle

XW: Without lens

G Housing Color Options



RAL9005


RAL9007

RAL9016





Order Code

P . W . C . S . O . G



Product Diagrams

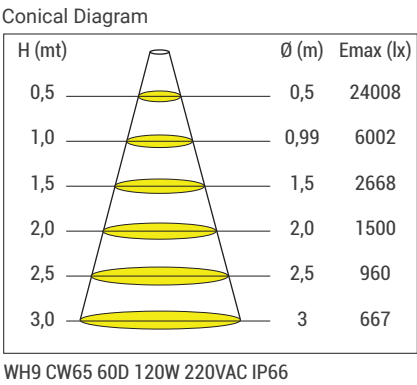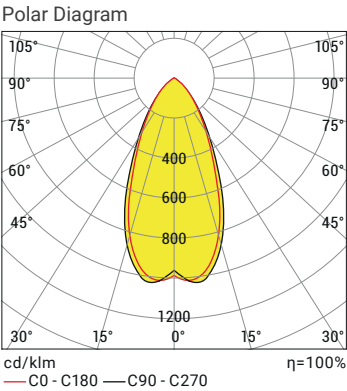

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						



İstek College, Antalya