





IK 10



- Professional LED light source WallWasher lighting fixture
- WallWasher family consisting of 4 different sizes
- -20 to +40 °C Operating temperature
- Anodized aluminum extrusion body

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Length (L) (mm)
WLP-1	WW-NW-CW	220-240V AC	28	3.332	330 mm
WLP-2	WW-NW-CW	220-240V AC	56	6.664	630 mm
WLP-3	WW-NW-CW	220-240V AC	84	9.996	920 mm
WLP-4	WW-NW-CW	220-240V AC	112	13.328	1.220 mm
WLP-1-DMX	RGBW	48V DC	28	-	330 mm
WLP-2-DMX	RGBW	48V DC	56	-	630 mm
WLP-3-DMX	RGBW	48V DC	84	-	920 mm
WLP-4-DMX	RGBW	48V DC	112	-	1.220 mm

*Power and Lumen values provided are based off of a coverless product with cold white (CW) LED.

C Light Color Options

WW: Warm White	3000K
NW: Natural White	4000K
CW: Cold White	6500K

RGBW

*Different colors are optional

S Driver Options


- 01 Standart Driver
- 06 DALI Driver

O Lens Options



XN: Extra Narrow Angle N: Narrow Angle M: Medium Angle W: Wide Angle XW: Without Angle

J Junction Options



01: Cable




Order Code


P . W . C . S . O . J . K . U . M



Product Diagrams

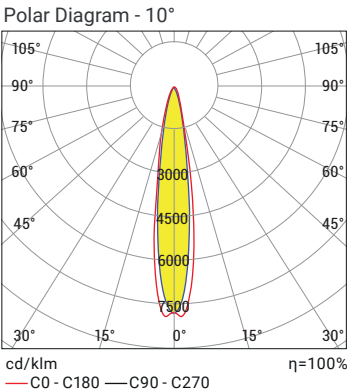


K Cable Direction Options



01: Single entry 03: Dual entry and exit*

**The max. junction qty may vary for the products with both entry and exit.*

U Upper Cover Options

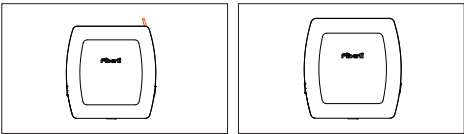

With Glare Shield Without Glare Shield

M Mounting Options

Stand connector

Optional Accessories

20: Standart Stand

34: Extension piece A=5cm
35: Extension piece A=10cm
36: Extension piece A=20cm

Extension pieces at any desired length are optional

Control System Options

Color Type		PWM	INV PWM	DMX	DALI	1-10V DC	TRIAC
WW-NW-CW					•	•	
RGBW				•			